


## Humidification Of Gas Streams Using Liqui-Cel® Membrane Contactors

The process of humidification occurs when a gas stream is brought in contact with a liquid stream (typically water). Liquid evaporates at the gas-liquid interface and the liquid vapor humidifies the gas. Conventionally, Spray or Bubble columns have been used for humidification. However, Liqui-Cel® Membrane Contactors offer a more efficient method.

All these benefits, plus the fact that membrane contactors are available in a wide range of sizes, make them ideally suitable in this application. The typical schematic flow diagram of a membrane humidification system is shown in the Figure below.

FEATURES	BENEFITS
The inter-phase contact area per unit device volume is very high	Equipment can be small in size, and hold up volumes are low
No flooding or loading limitation since the gas liquid interface is stable	Gas and liquid flow rates can be controlled independently
Operation is gravity-independent	Gas and liquid can flow horizontally or vertically.
Humidification can be done in-line at high gas pressures	Gas does not have to be re-pressurized after humidification

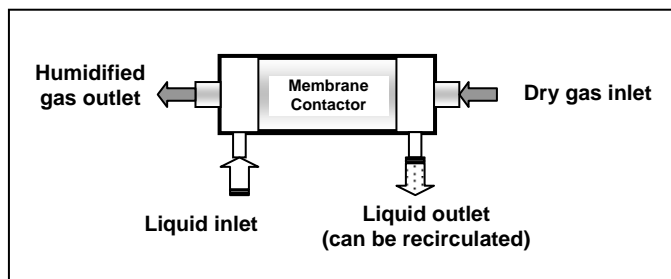

A membrane contactor is made from microporous hydrophobic hollow fiber membranes, which repel water and allow stable gas-liquid interface to form without dispersion. If the liquid is water or an aqueous solution the membrane pores remain gas-filled and the rate of humidification is controlled only by diffusion in the gas phase, which is very fast. If the membrane does not repel the liquid and the pores are filled by wicking action, membrane contactors will still work under appropriate process conditions. Humidification with a liquid other than water (e.g. an organic solvent) is therefore also possible.

The humidity of a gas stream can be expressed in terms of relative humidity or absolute humidity. Relative humidity can be 0% (bone-dry gas) to 100% (completely saturated), and is the ratio of the 'partial pressure' of liquid vapor in the gas stream to the 'vapor pressure' of liquid at the prevailing temperature. The absolute humidity, on the other hand, is simply the ratio of the mass of liquid vapor in the gas phase to the mass of dry gas. Two different humidified gas streams can have identical relative humidity but widely different absolute humidity, depending on temperature, gas pressure and molecular weight of the gas.

Membrane contactors have several unique advantages over conventional columns or towers. The degree of humidification can be regulated by proper control of operating parameters and system design.


The driving force for humidification is the liquid vapor pressure, which depends strongly on temperature. As the liquid evaporates, however, the latent heat of evaporation causes the local liquid surface temperature to drop, which in turn reduces the local vapor pressure and the rate of humidification. Heat and mass transfer processes are thus intimately coupled. Depending on how fast the bulk liquid moves inside the contactor, this 'evaporative cooling' effect may be significant. To minimize the effect of evaporative cooling it is recommended to continuously flow liquid through the contactor. Depending on the application, the

liquid may be recirculated back to the contactor, in which case the system should be designed to maintain the water temperature.

Liqui-Cel<sup>®</sup> Membrane Contactors are available in a variety of sizes with a range of membrane area from 0.1 m<sup>2</sup> to 135 m<sup>2</sup>. A membrane contactor has a shell side and a lumen side. It is possible to run liquid on shell side and gas on lumen side, or vice versa. However, from pressure-drop considerations it is generally preferred to have the gas flow through the shell side (lower pressure drop) for humidification applications.

The humidity of the gas leaving the membrane contactor depends on many factors. Primary process parameters are liquid and gas temperatures, liquid and gas flow rates, membrane area, and gas pressure. In general, as gas flow rate increases the effluent gas humidity decreases. Providing additional membrane area will increase humidity. The chart shown at right indicates the trend of absolute humidity with gas flow rate at various temperatures. The results illustrated are for humidification of gaseous nitrogen with water

in a 4x28 Liqui-Cel<sup>®</sup> Membrane Contactor with approximately 13.3 m<sup>2</sup> of gas-liquid contact area (lumenside). The gas is assumed to be at atmospheric pressure and the evaporative cooling has been assumed to be insignificant.

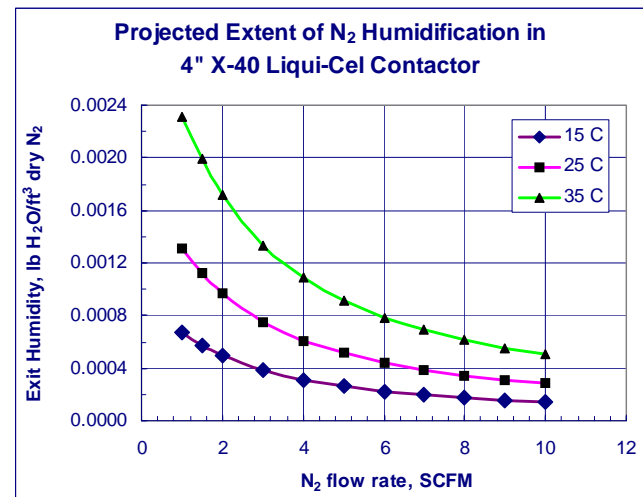

Please contact your local Membrana representative if you have additional questions or you would like to discuss how these membranes can be incorporated into your system for humidification of gas.

This product is to be used only by persons familiar with its use. It must be maintained within the stated limitations. All sales are subject to Seller's terms and conditions. Purchaser assumes all responsibility for the suitability and fitness for use as well as for the protection of the environment and for health and safety involving this product. Seller reserves the right to modify this document without prior notice. Check with your representative to verify the latest update. To the best of our knowledge the information contained herein is accurate. However, neither Seller nor any of its affiliates assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of the suitability of any material and whether there is any infringement of patents, trademarks, or copyrights is the sole responsibility of the user. Users of any substance should satisfy themselves by independent investigation that the material can be used safely. We may have described certain hazards, but we cannot guarantee that these are the only hazards that exist.

Liqui-Cel, Celgard, SuperPhobic and MiniModule are registered trademarks and NB is a trademark of Membrana-Charlotte, A division of Celgard, LLC and nothing herein shall be construed as a recommendation or license to use any information that conflicts with any patent, trademark or copyright of Seller or others.

©2008 Membrana - Charlotte A Division of Celgard, LLC

(TB23Rev3\_10-05)

**Membrana - Charlotte**  
A Division of Celgard, LLC  
13800 South Lakes Drive  
Charlotte, North Carolina 28273  
USA  
Phone: (704) 587 8888  
Fax: (704) 587 8585

**Membrana GmbH**  
Oehder Strasse 28  
42289 Wuppertal  
Germany  
Phone: +49 202 6099 - 658  
Phone: +49 6126 2260 - 41  
Fax: +49 202 6099 -750

**Japan Office**  
Shinjuku Mitsui Building, 27F  
1-1, Nishishinjuku 2-chome  
Shinjuku-ku, Tokyo 163-0427  
Japan  
Phone: 81 3 5324 3361  
Fax: 81 3 5324 3369

**MEMBRANA**  
MEMBRANA  
Underlining Performance

[www.liqui-cel.com](http://www.liqui-cel.com)

A **POLYPORE** Company